
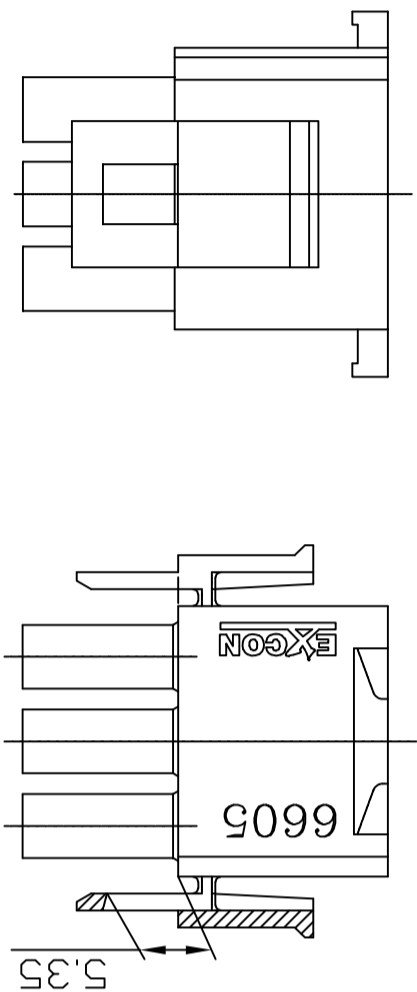
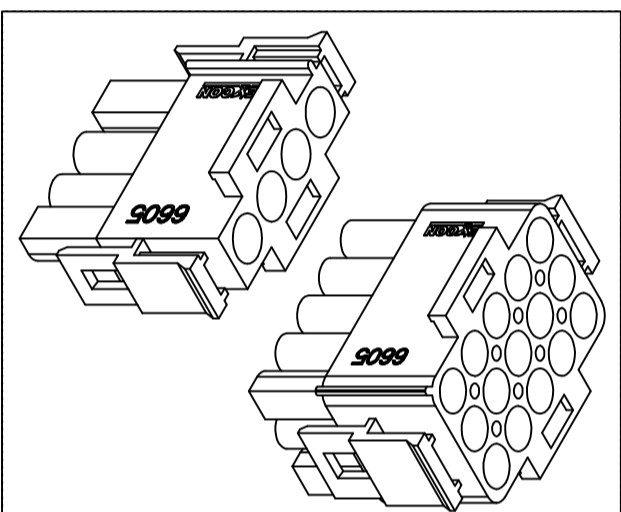



PART NO.
6605xxHM051
DWG NO.
C6605HM

Dimensional & Ordering Information:

Part No.	Circuits	A	B	C	D
660501HM051	1	--	--	9.65	9.65
660502HM051	2	6.35	--	7.6	13.97
660503HM051	3	12.70	--	7.6	20.32
660504HM051	4	19.05	--	7.6	26.67
660505HM051	4	25.04	--	7.6	33.02
6605A6HM051	6	31.75	--	7.6	39.37
660506HM051	6	6.35	12.70	20.32	13.97
660508HM051	8	44.45	--	7.6	52.07
660509HM051	9	12.70	12.70	20.32	20.32
660510HM051	10	57.15	--	7.6	64.77
660512HM051	12	19.05	12.70	20.32	26.67
660515HM051	15	25.40	12.70	20.32	33.02

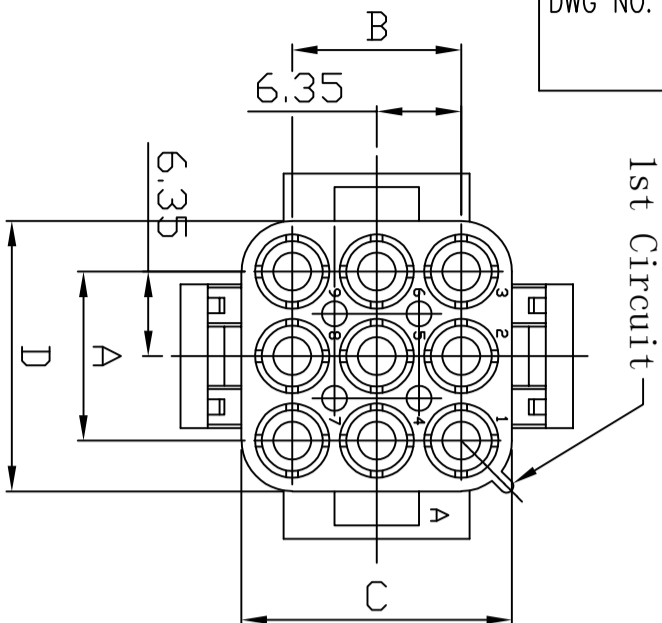

- NOTE:
- Housing Material: Nylon 66 UL94V2
 - Color: Natural
 - Use Material: NY-V2 , 21SP,1300XG1,101F
 - Withstand voltage: 5000V AC/minute.
 - Current rating: 5A AC/DC.
 - Voltage rating: 600V AC/DC

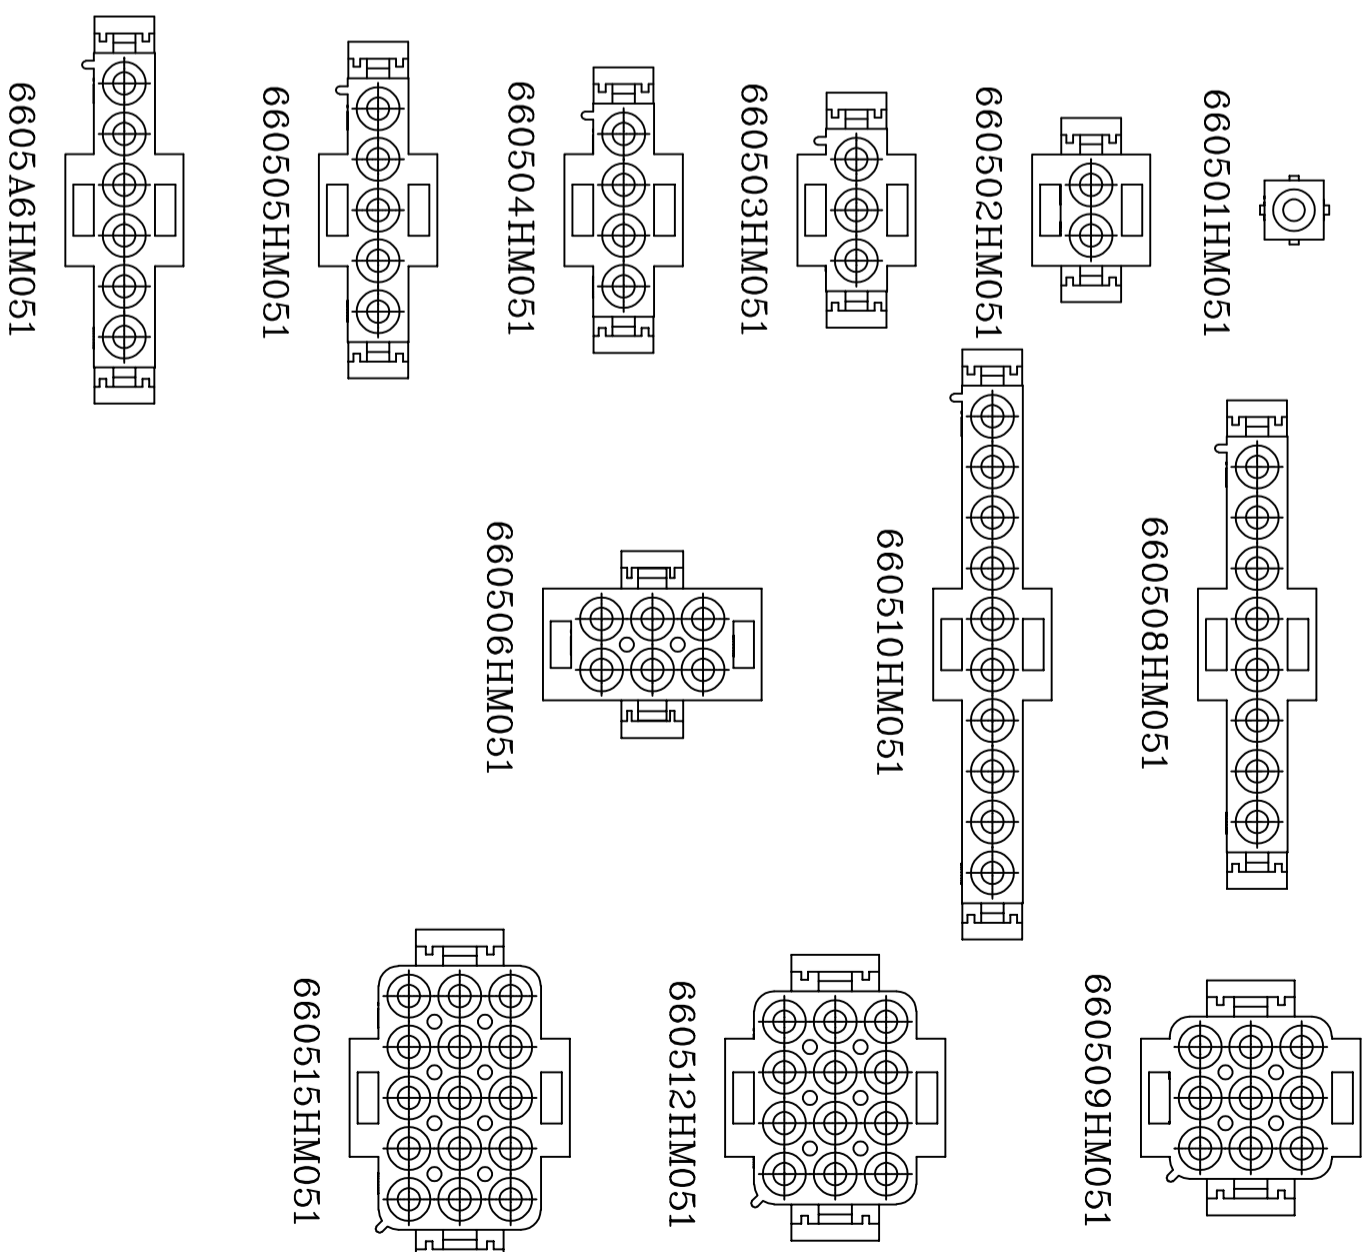

UNLESS OTHERWISE SPECIFIED TOLERANCES
3 PLACE ±0.5 ±0.10
2 PLACE ±1.5 ±0.25
1 PLACE ±2.0 ±0.50
ANGLE DIM



EXCON TECHNOLOGY COMPANY

REV.	REVISION	UNIT	DIS	DATE	DWG NO.	PART. NO
SCALE	REV.	PAGE:			C6605HM	6605xxHM051
NDNE	B	1/1	TYRD ANGLE PROJECTION			

