
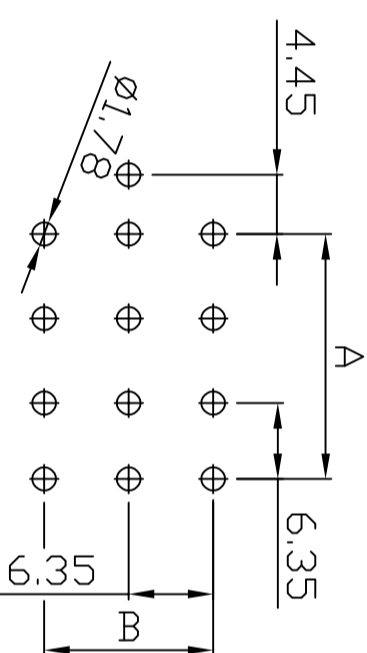
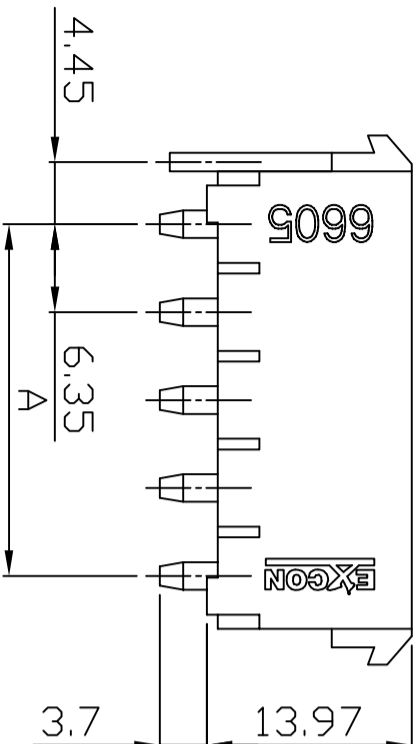





PART NO.
6605xxWS051
DWG NO.
C6605WS

Dimensional & Ordering Information:


Part No.	Circuits	Dim A	Dim B	Dim C	Dim D
660502WS051	2	6.35	--	7.62	13.97
660503WS051	3	12.70	--	7.62	20.32
660504WS051	4	19.05	--	7.62	26.67
660505WS051	5	25.04	--	7.62	33.02
660506WS051	6	6.35	12.7	20.32	13.97
660509WS051	9	12.70	12.7	20.32	20.32
660512WS051	12	19.05	12.7	20.32	26.67
660515WS051	15	25.4	12.7	20.32	33.02

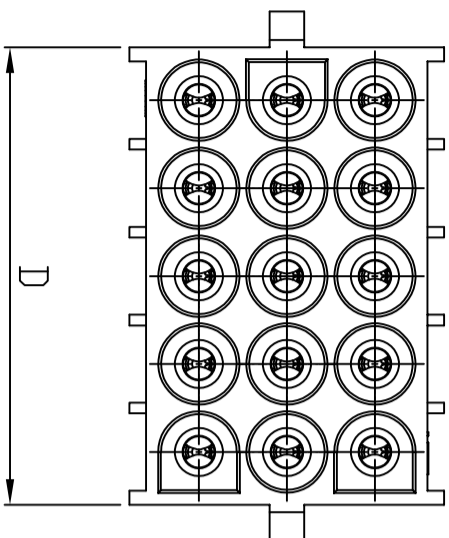


RECOMMENDED PCB LAYOUT
(PCB THK=1.0~1.6)

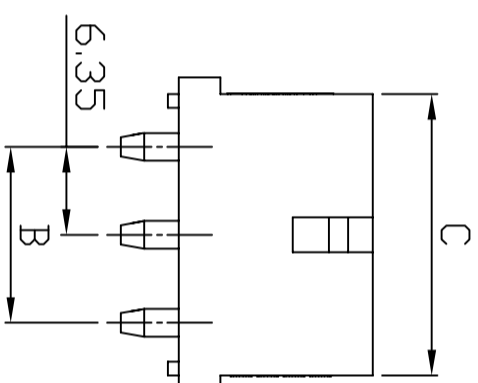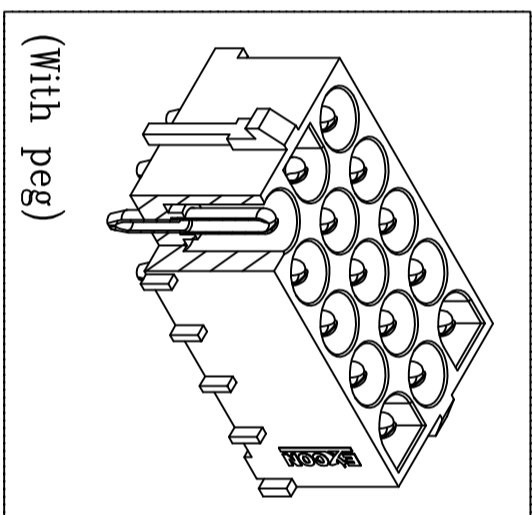


660502WS051

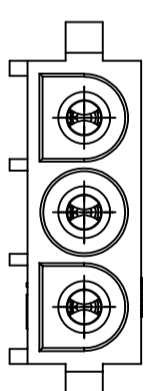


660503WS051

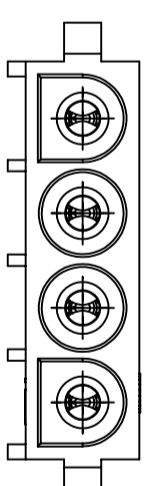


660504WS051

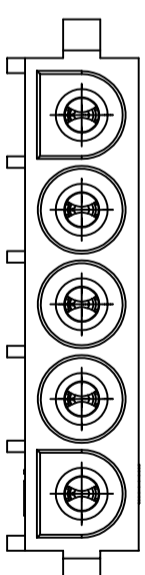


660505WS051




660506WS051

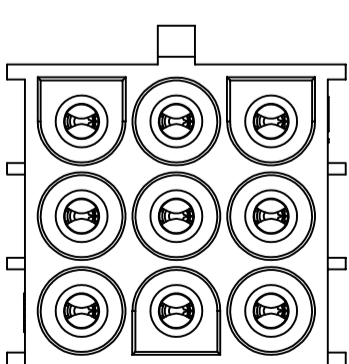

660509WS051

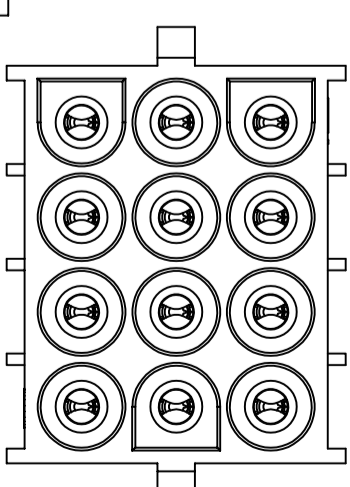

660512WS051

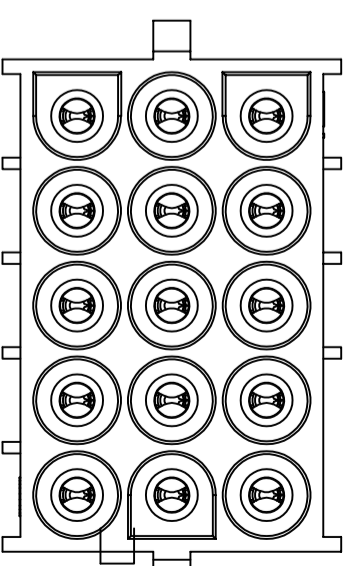

660515WS051

NOTE:

- Housing Material: Nylon 66 UL94V2
- Color: Natural
- Withstand voltage: 5000V AC/minute.
- Current rating: 5A AC/DC.
- Voltage rating: 600V AC/DC

REV.	REVISION	UNIT	DIS	DATE	DWG NO.	PART. NO
SCALE	REV.	PAGE:	UNIT	m/m	C6605WS	6605xxWS051
NDNE	B	1/1	TYRD ANGLE PROJECTION			

UNLESS OTHERWISE SPECIFIED TOLERANCES
 3 PLACE ±0.5 ±0.10
 2 PLACE ±1.5 ±0.25
 1 PLACE ±2.0 ±0.50
 ANGLE DIM

EXCON
EXCON TECHNOLOGY COMPANY