



Approval & Rating:

Rating	Approval
6(3)A 250VAC~T125/55	



PANEL CUTOUT DIMENSION:
(面板安裝孔開口尺寸)



PANEL THICKNESS	X	Y

Electrical(電氣性能):

(接觸電阻) INITIAL CONTACT RESISTANCE: 20Ω Max

(操作力量) OPERATION FORCE: 1000±400gf


(絕緣電阻) INSULATION RESISTANCE: 100mΩ Min 500VDC

(電氣壽命) ENDURANCE: 10,000 CYCLES

SPEC DRAWING(規格圖面)


Unit: mm

FR01-A1F1L1-R

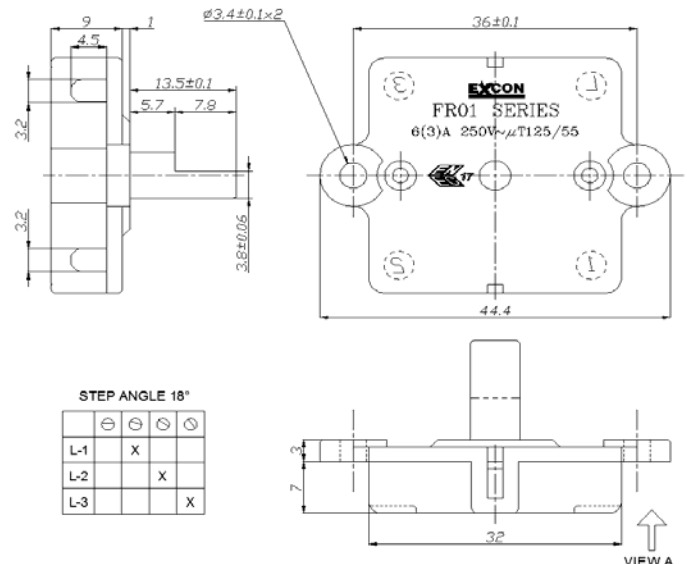


HOW TO ORDER(採購識別碼)

FR01 SERIES ORDERING SYSTEM

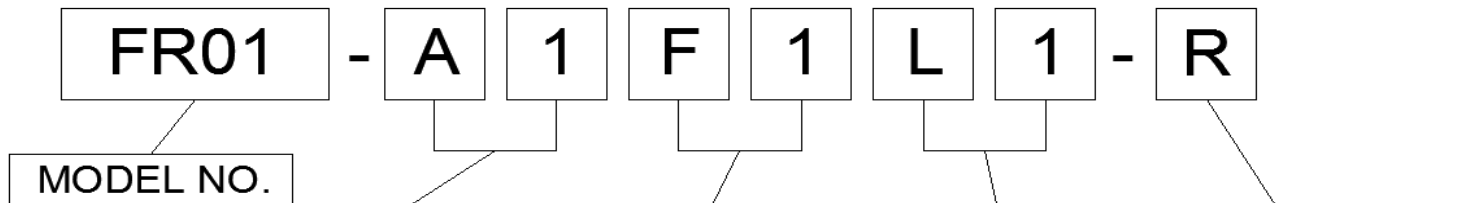

STEP ANGLE	
A1	18°
A2	22.5°
A3	45°

CODE	FUNCTION TYPE	STEP ANGLE		
		A1	A2	A3
F1	OFF, L-1, L-2, L-3	O	O	O
F2	OFF, L-1, L-2	X	X	O
F3	L-1, OFF	X	X	O
F4	L-1, L-2, L-3	X	X	O
F5	OFF, L-1	X	X	X
M1	(L-3), OFF, L-1, L-2	O	O	X
	(L-1), OFF, L-3, L-2	X	X	O
M2	(L-1), OFF, L-3	X	X	O
M3	(L-1), OFF	X	X	O



RoHS COMPLIANCE	
R	RoHS CONFORMITY
	NONE

"O"- AVAILABLE/"X"- UNAVAILABLE
 (X)-SPRING BACK
 UPDATE:AUGUST 3,2006