




Double-Pole and Single-Pole Rocker Power Switches

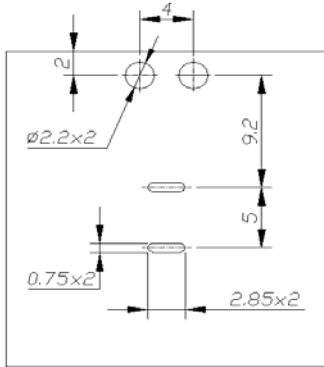


HOUSING TYPE:PC IN PANEL

Approval & Rating:

Rating	Approval
6(1)A 250VAC~T125/55	 

PANEL CUTOUT DIMENSION:
(面板安裝孔開口尺寸)



PANEL THICKNESS	X	Y
0.75~1.25mm	13.6 ^{+0.0} _{-0.1} mm	9.2 ^{+0.1} _{-0.0} mm
1.25~2.0mm	13.7 ^{+0.0} _{-0.1} mm	9.2 ^{+0.1} _{-0.0} mm
2.0~2.5mm	13.8 ^{+0.0} _{-0.1} mm	9.2 ^{+0.1} _{-0.0} mm

HOUSING TYPE:SNAP IN PANEL

Electrical(電氣性能):

(接觸電阻) INITIAL CONTACT RESISTANCE:20Ω Max

(操作力量) OPERATION FORCE:150±100gf


(絕緣電阻) INSULATION RESISTANCE:100mΩ Min 500VDC

(電氣壽命) ENDURANCE: 10,000 CYCLES

SPEC DRAWING(規格圖面)


Unit: mm

SS09-BBIWL-RP20-R

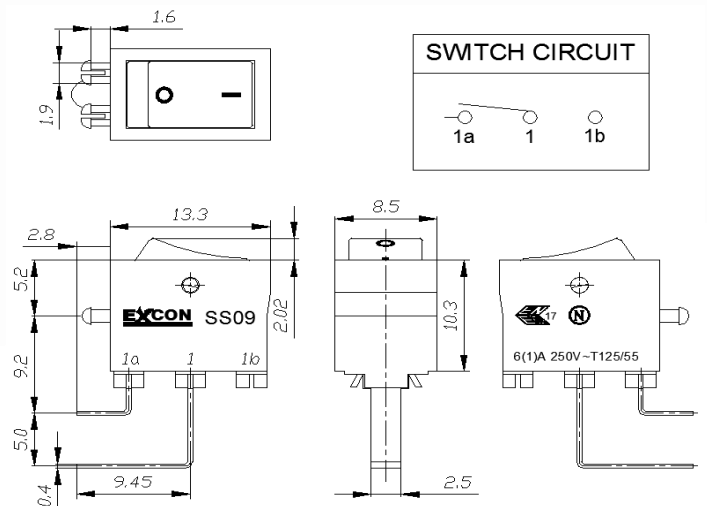

HOW TO ORDER(採購識別碼)

SS09 SERIES ORDERING SYSTEM

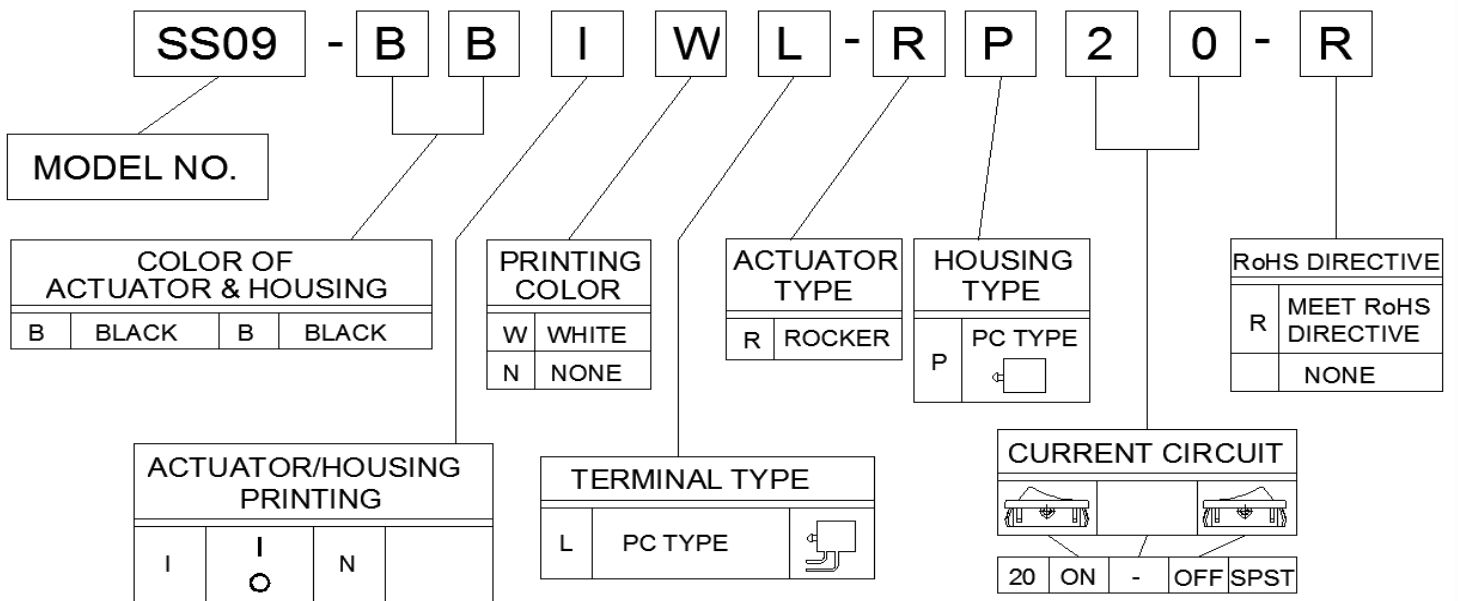

www.excon.com.cn
 89, Xing Long Road, Ping Zhen Dist., 321100