



Double-Pole and Single-Pole Rocker Power Switches

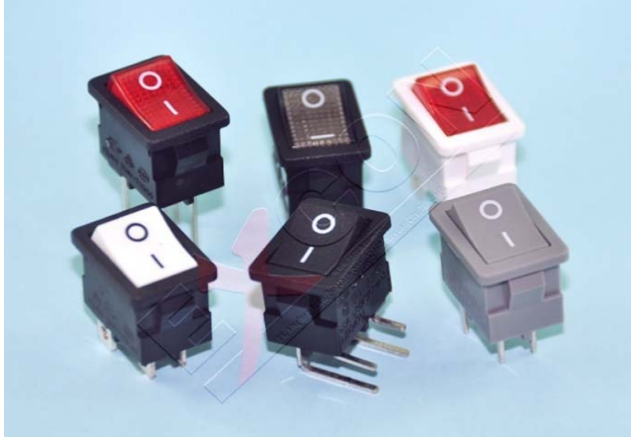

Approval & Rating:

Rating	Approval
12(4)A 250VAC~T125/55	
12(4)A 250VAC~T85/55	
6A 125/250VAC~T125/85 10A 125/250VAC~T125/85 12A 125/250VAC~T125/85 16(4)A 250VAC~T125/85	

PANEL CUTOUT DIMENSION:
(面板安裝孔開口尺寸)



PANEL THICKNESS	X	Y
0.75~1.25mm	19.2 $\begin{smallmatrix} +0.0 \\ -0.1 \end{smallmatrix}$ mm	12.9 $\begin{smallmatrix} +0.1 \\ -0.0 \end{smallmatrix}$ mm
1.25~2.0mm	19.4 $\begin{smallmatrix} +0.0 \\ -0.1 \end{smallmatrix}$ mm	12.9 $\begin{smallmatrix} +0.1 \\ -0.0 \end{smallmatrix}$ mm
2.0~3.0mm	19.8 $\begin{smallmatrix} +0.0 \\ -0.1 \end{smallmatrix}$ mm	12.9 $\begin{smallmatrix} +0.1 \\ -0.0 \end{smallmatrix}$ mm

Electrical(電氣性能):

(接觸電阻) INITIAL CONTACT RESISTANCE:20Ω Max

(操作力量) OPERATION FORCE:500±200gf



(絕緣電阻) INSULATION RESISTANCE:100mΩ Min 500VDC

(電氣壽命) ENDURANCE: 10,000 CYCLES





SPEC DRAWING(規格圖面)

Unit: mm





SS21-BBTWA2-R

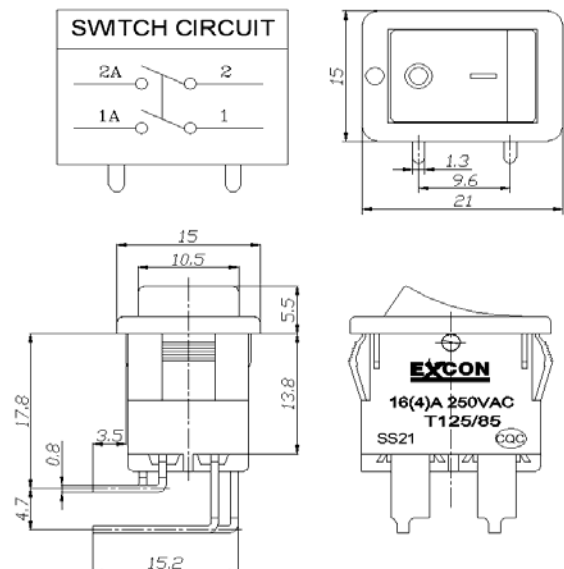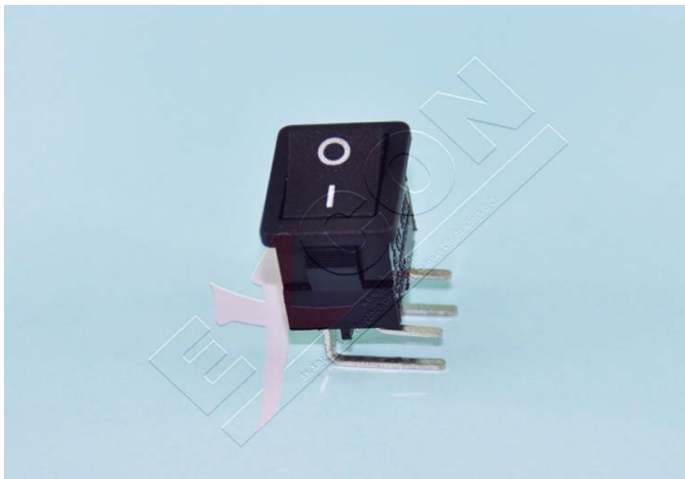





SS21-WBIBG2-R

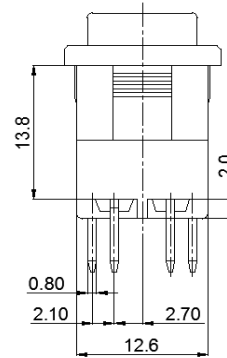





SS21-RBIWG-L02-R



SS21-RBIWD2-L02-R

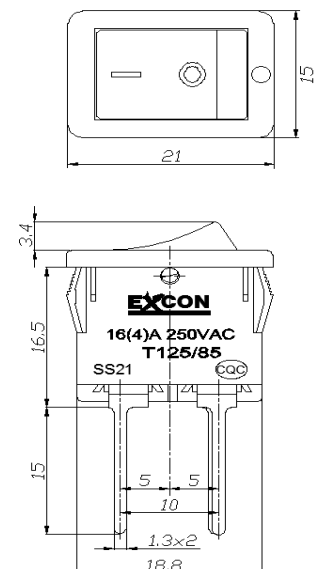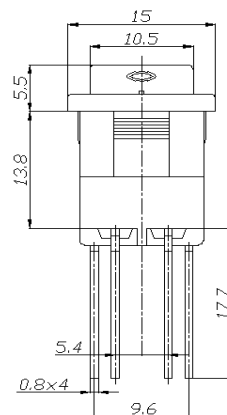

SS21-EEIWC2-R

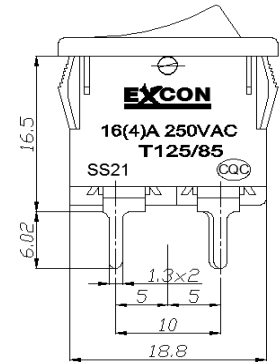

HOW TO ORDER(採購識別碼)

SS21 SERIES ORDERING SYSTEM

SS21 - B B I W G 2 - S 1 - L 0 1 - R

MODEL NO.

COLOR OF ACTUATOR & HOUSING			
B	BLACK	W	WHITE
R	RED	E	GREY
G	GREEN	A	AMBER(S)
L	BLUE	C	COLORLESS
Y	EGG YELLOW		

PRINTING COLOR	
W	WHITE
B	BLACK
D	GOLD
N	NONE

SHAFT TYPE	
2	2mm HIGH
	STANDARD

LAMP TYPE	
L	WITH LAMP
P	PC ACTUATOR NON-LIGHTED
	NONE

RESISTOR	
0	-
1	100KΩ
2	200KΩ
3	75KΩ
4	68KΩ
5	470KΩ
6	620Ω
7	390Ω
8	240Ω
9	47KΩ
	NONE

RoHS DIRECTIVE	
R	MEET RoHS DIRECTIVE
N	MEET RoHS DIRECTIVE & SPECIAL HOUSING
	NONE

ACTUATOR/HOUSING PRINTING			
I	I	D	●
N		O	ON OFF
T	—	E	—
B		F	—
A	I	G	—
H	I ON O OFF		

TERMINAL TYPE	
G	QUICK-CONN
P	PC TYPE(STD)
A	PCB TYPE(CONTRARY)
B	PCB TYPE(10.9mm)
C	PCB TYPE(6mm)
D	PCB TYPE(15mm)

CURRENT CIRCUIT	
S1	SINGLE POLE 1/1A SIDE
S2	SINGLE POLE 2/2A SIDE
* S3	SINGLE POLE 1/1A SIDE & 2
	DOUBLE POLE

* LAMP TYPE ONLY

LIGHT COLOR	
0	AMBER(S)
2	RED
3	GREEN
4	BLUE
	NONE