

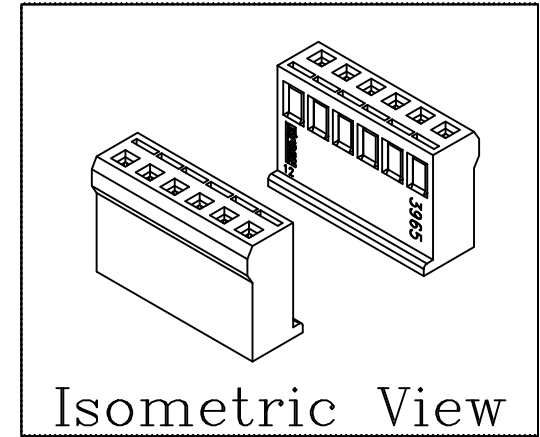



PART NO. 3965xxHA051  
 DWG NO. C3965HA

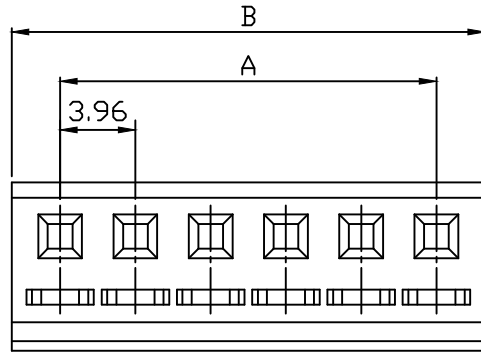

Circuit 1st

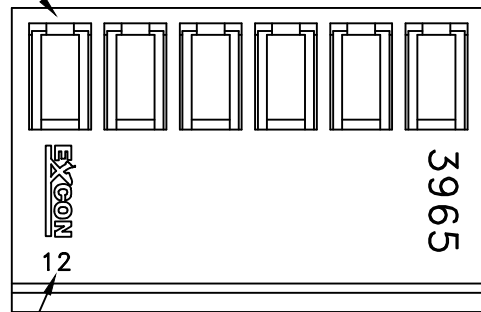

△ 模號

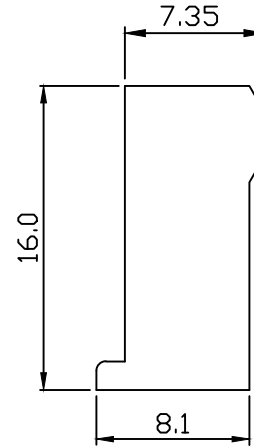

Dimensional & Ordering Information:

Part No.	Circuits	Dim A	Dim B
396502HA051	2	3.96	9.06
396503HA051	3	7.92	13.02
396504HA051	4	11.88	16.98
396505HA051	5	15.84	20.94
396506HA051	6	19.80	24.90
396507HA051	7	23.76	28.86
396508HA051	8	27.72	32.82
396509HA051	9	31.68	36.78
396510HA051	10	35.64	40.74
396511HA051	11	39.60	44.70
396512HA051	12	43.56	48.66
396513HA051	13	47.52	52.62
396514HA051	14	51.48	56.58
396515HA051	15	55.44	60.54

NOTE:

1. Housing Material: Nylon 66 UL94V2
2. Insulation resistance: 1000MΩ min.
3. Withstand voltage: 1000V AC/minute.
4. Current rating: 5A AC/DC.
5. Voltage rating: 250V AC/DC
6. Color: Natural

B		DWG RELEASE		△ Christy 3/3 2016	
REV.	REVISION			DIS	DATE
SCALE	REV.	PAGE:	UNIT	mm	
3/1	B	1/1	THIRD ANGLE	PROJECTION	⊕

UNLESS OTHERWISE SPECIFIED TOLERANCES  
 3 PLACE ±0.5 ±0.10  
 2 PLACE ±1.5 ±0.35  
 1 PLACE ±2.0 ±0.50  
 ANGLE DIM



DWG NO: C3965HA  
 PART.NO: 3965xxHA051